


Workbench Adapter

Clamping Elements for Multi Function Table



Simply better.

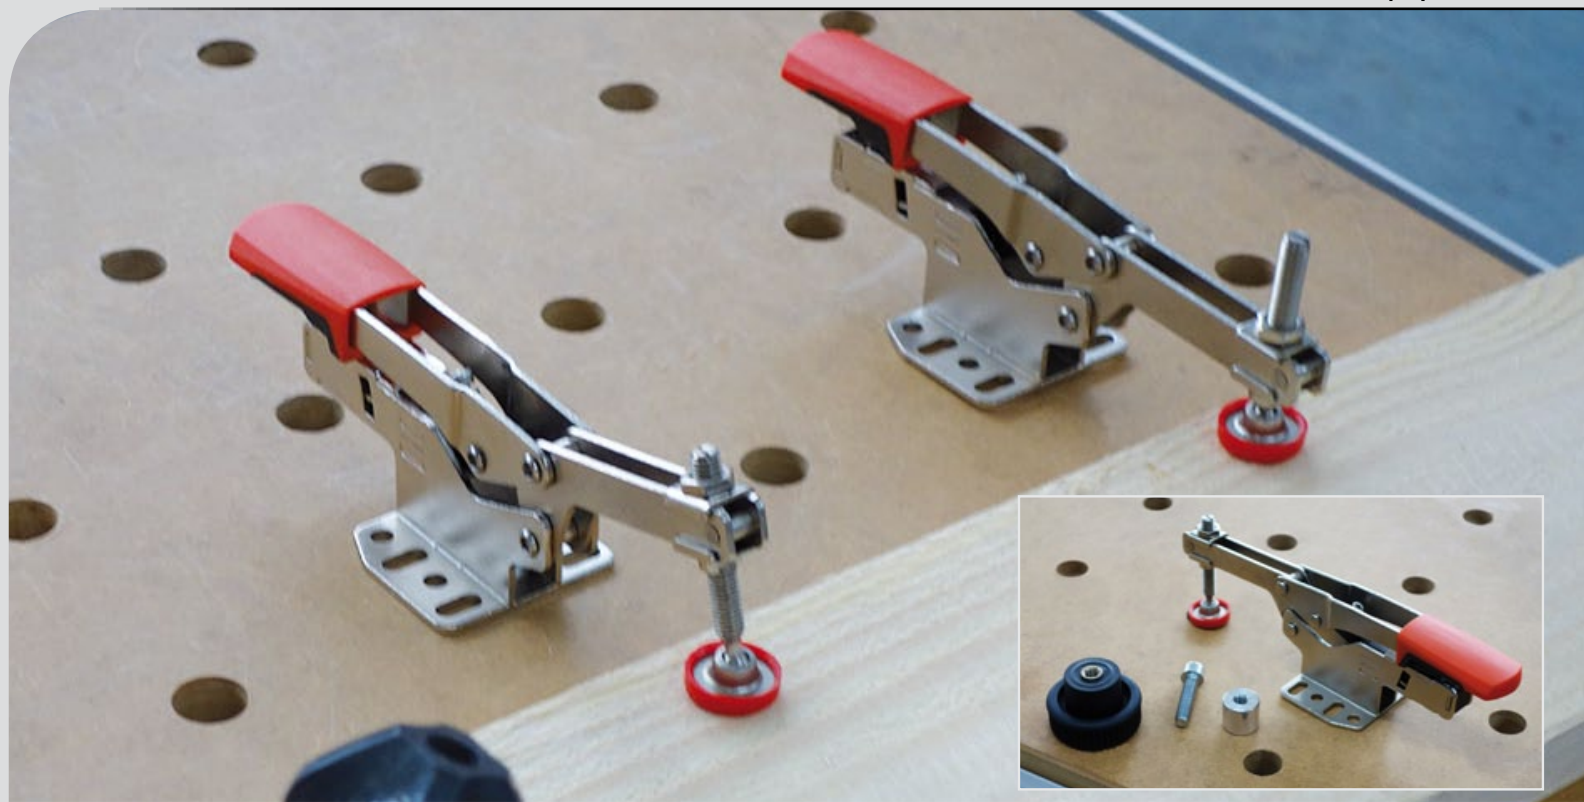

Accessory for use on multifunction (MFT) tables

Wood tables with 20 mm hole diameter and 19 to 25 mm plate thickness (e.g. Festool MFT)

STC-SET-T20

This special adapter allows BESSEY toggle clamps to be used on multifunction tables. The three-part accessory set can be assembled in a few simple steps. For this, a locking pin is attached via a cylinder screw under the base plate. Added in this way, the toggle clamp can be used directly in the multifunction table and secured from underneath with a large, easy to handle, knurled plastic knob..

Set Includes

- 1 x Cylindrical screw M 8 x 35 mm
- 1 x Lock pin 20 mm OD x 17 mm long
- 1 x Knurled knob with M8 thread.

Use on BESSEY Auto Adjust toggle clamps with horizontal base plate:

Horizontal toggle clamp STC-HH50 / -HH70

Push/pull clamp STC-IHH25

Vertical toggle clamp STC-VH50

	Clamp Hole Diameter	Workbench Hole Diameter
STC-SET-T20	8.2 mm	20 mm



STC-SET-T20

BESSEY® Self-adjusting toggle clamps

Clamps suitable for use with STC-SET-T20 on an MFT table

- Works with matrix tables having 20 mm diameter holes (e.g. Festool MFT)
- Ideal for work surface thicknesses in the 19 to 25 mm range
- Large easy to grip knob
- BESSEY clamps designed to work with this system are the STC-HH50, STC-HH70, STC-VH50 and STC-IHH25
- STC-SET-T20 is a low cost optional accessory - clamps not included



Vertical toggle with open arm with horizontal base plate

STC-SET-T20 plus
STC-VH50




Horizontal toggle with flanged base plate

STC-SET-T20 plus one of:
STC-HH50
STC-HH70



Inline toggle with angled base plate

STC-SET-T20 plus
STC-IHH25

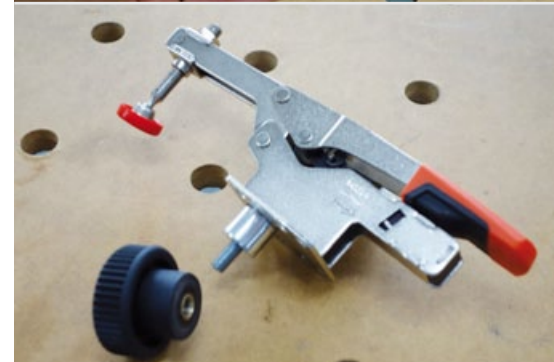

T-Slot Table Application

The BESSEY self adjusting toggle clamps were modified to include an 8.2 mm hole in the horizontal base for different accessories. In this case, the main accessory is the STC-SET-T20 and it can be used on tables with a 20 mm hole (like MFT). That same 8.2 mm hole in the toggle clamp also allows it to be used with a T-slot table. Use an appropriately sized 8 mm fastener and a t-slot nut that fits your machine table or system and the application becomes very straightforward.