




# Lever clamps

## Differentiating features of the first and second line

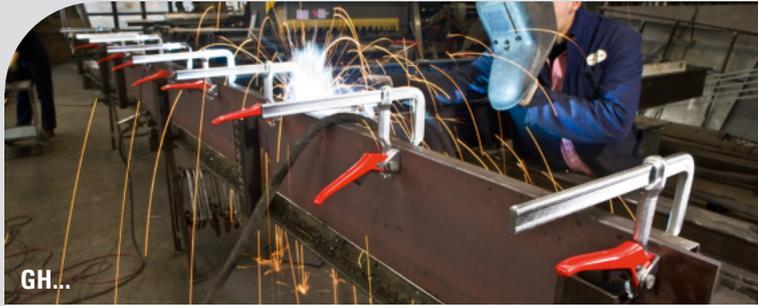

	Original BESSEY lever clamp	Second line BESSEY classiX
	GH...	GSH...
		
<b>Opening a</b>	100–1,250 mm	100–1,000 mm
<b>Throat depth b</b>	60–140 mm	50–140 mm
<b>Clamping force up to</b>	8,500 N	7,500 N
<b>Sintered steel cams</b>	 particularly hard-wearing, low friction due to higher surface hardness	–
<b>Optimised rail profile</b>	 ✓ greater reserves of power, thanks to optimised rail profile, for even clamping force build-up, especially under maximum utilisation of the clamping range	 –
<b>Intellectual property rights</b>	✓	–

